

# KAWASAKI ZX-6R 636 '19-

## M O U N T I N G I N S T R U C T I O N S

## VIDEO

REF 3176

SIDE SPOILER DOWNFORCE



1 Person



40 min



EASY



N° 7

ALLEN

N° 2,5  
N° 3


| ID | PIEZA/PART | DESCRIPCIÓN                                                  | DESCRIPTION                                             | QTY | REF             |
|----|------------|--------------------------------------------------------------|---------------------------------------------------------|-----|-----------------|
| 1  |            | Base alerón derecha                                          | Right main plain spoiler                                | 1   | 10683           |
| 2  |            | Winglet negro/azul/rojo/naranja/verde derecho                | Right black/blue/red/orange/green Winglet               | 1   | 3692N/A/R/T/V   |
| 3  |            | Base alerón izquierda                                        | Left main plain spoiler                                 | 1   | 10683           |
| 4  |            | Winglet negro/azul/rojo/naranja/verde izquierdo              | Left black/blue/red/orange/green Winglet                | 1   | 3692N/A/R/T/V   |
| 5  |            | Soporte metálico derecho                                     | Right metal suport                                      | 1   | SOPOR2P9-R-3176 |
| 6  |            | Soporte metálico izquierdo                                   | Left metal suport                                       | 1   | SOPOR2P9-L-3176 |
| 7  |            | Tuerca autoblocante M4                                       | M4 Locking nut                                          | 4   | TUERCAE985-0290 |
| 8  |            | Arandela de goma Ø4,5 x Ø11 x 2mm                            | Ø4,5 x Ø11 x 2mm Rubber washer                          | 4   | ARAND-EPDM--722 |
| 9  |            | Arandela de nylon M4x0,5                                     | M4x0,5 Nylon washer                                     | 8   | ARNV00000000311 |
| 10 |            | Tornillo Allen M4x12 Ø9 ISO 7380                             | M4x12 Ø9 ISO 7380 Allen screw                           | 4   | TORNI-I7380-800 |
| 11 |            | Tuerca de clip M5                                            | M5 clip nut                                             | 2   | TUERCA-TRT-M5-- |
| 12 |            | Tornillo Allen M5x30 Ø9 ISO 7380                             | M5x30 Ø9 ISO 7380 Allen screw                           | 2   | TORNI-I7380-767 |
| 13 |            | Casquillo Ø14 x Ø8 x 18                                      | Ø14 x Ø8 x 18 Arrowhead                                 | 2   | CASQUI-----0139 |
| 14 |            | Tapón tornillo Allen M5 ISO 7380                             | M5 ISO 7380 Allen screw cap                             | 4   | TAPON-----85    |
| 15 |            | Tornillo Allen M5x11 Ø11 ISO 7380                            | M5x11 Ø11 ISO 7380 Allen screw                          | 4   | TORNI-AI----520 |
| 16 |            | Arandela de nylon M5x1                                       | M5x1 Nylon washer                                       | 4   | ARNV00000000245 |
| 17 |            | Cinta adhesiva de doble cara 30x10mm (se suministra montada) | 30x10mm double-sided adhesive tape (supplied assembled) | 4   | ADHESI-----263  |

# KAWASAKI ZX-6R 636 '19-

## INSTRUCCIONES DE MONTAJE - MOUNTING INSTRUCTIONS - MONTAGEANLEITUNG

**1**


**DISASSEMBLY  
DESMONTAJE**

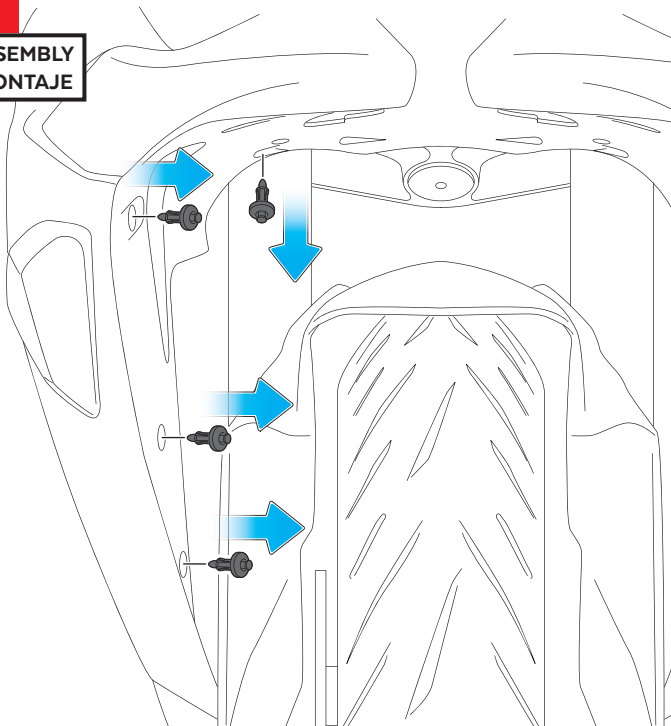

Se muestra el montaje del lado derecho a modo de ejemplo, realizar los mismos pasos para el montaje del lado izquierdo.  
The right side assembly is shown as an example, so the same steps can be performed for the left side assembly.


**2**

**ASSEMBLY  
MONTAJE**

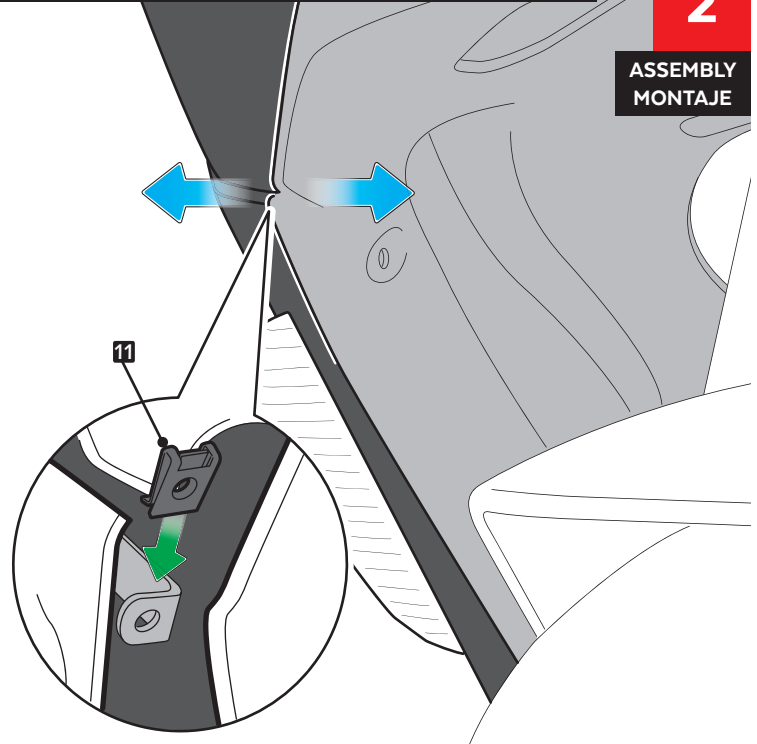


**3**

**ASSEMBLY  
MONTAJE**

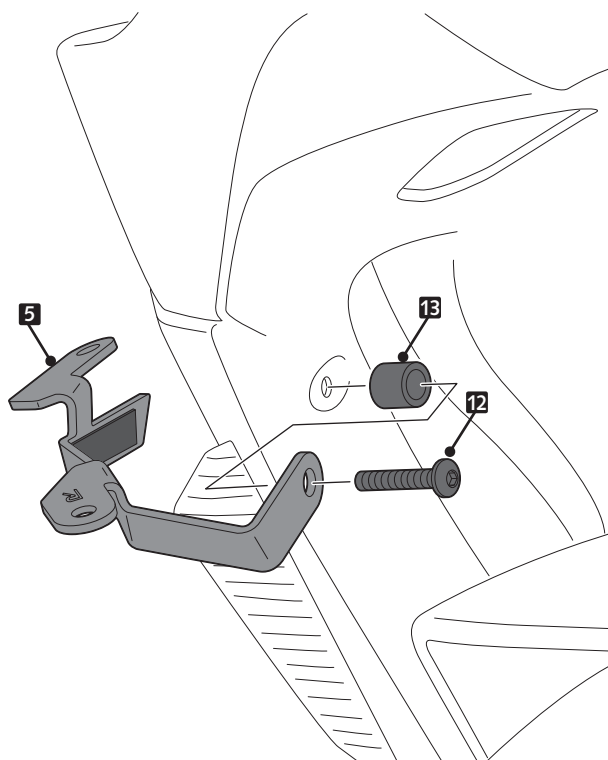

**4**

**ASSEMBLY  
MONTAJE**

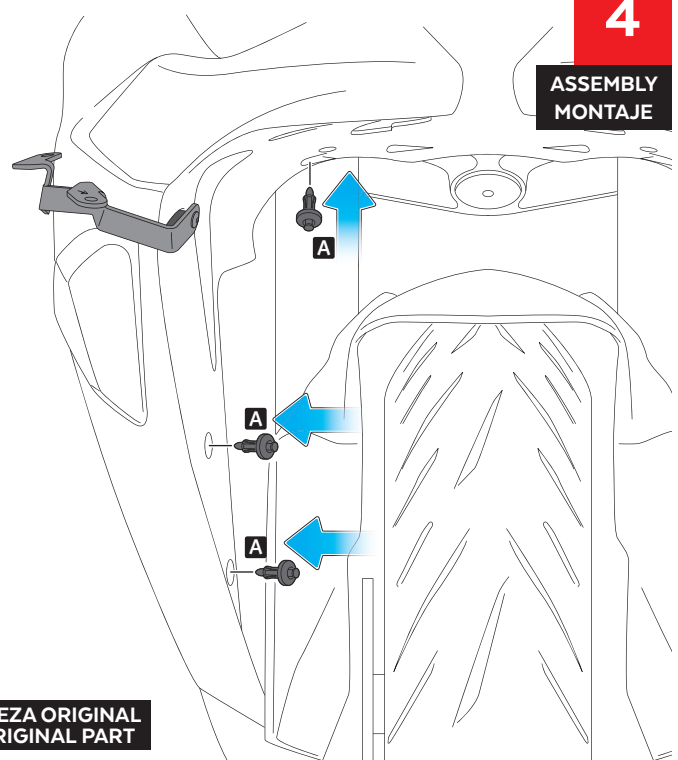

**A** PIEZA ORIGINAL  
ORIGINAL PART


# KAWASAKI ZX-6R 636 '19-

## INSTRUCCIONES DE MONTAJE - MOUNTING INSTRUCTIONS - MONTAGEANLEITUNG

**5**

ASSEMBLY  
MONTAJE


APPLY PRESSURE ON ADHESIVE AREA FOR 1 MINUT.  
IDEAL TAPE APPLICATION IS ACCOMPLISHED WHEN  
TEMPERATURE IS BETWEEN 21 °C and 38 °C AND THE  
BOND IS ALLOWED TO DWELL 24 HOURS.

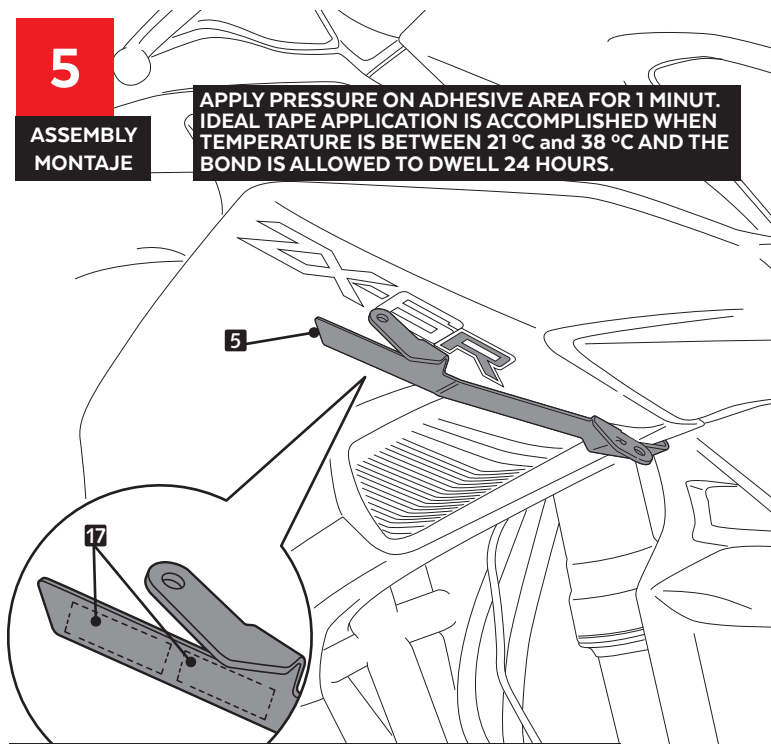

**ID-17** Extraer papel de cinta adhesiva de doble cara.  
Extract the paper from the double-sided adhesive tape.

**6**

ASSEMBLY  
MONTAJE

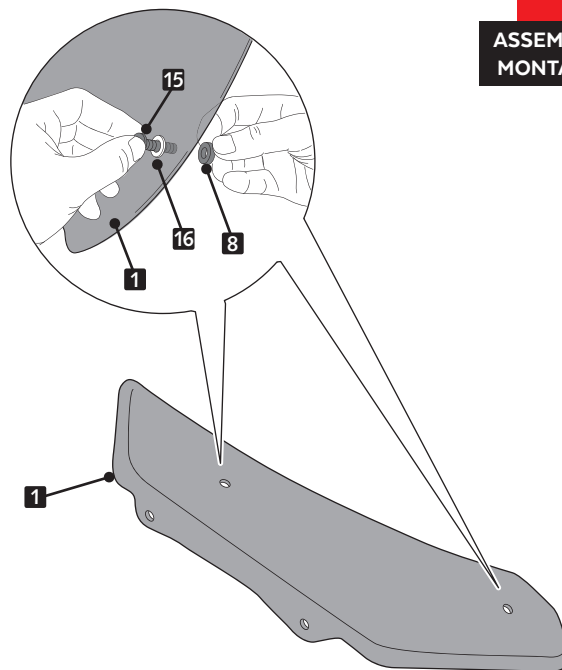

**7**

ASSEMBLY  
MONTAJE

