

SHAD

HONDA NX 500 '24

H0NX54IF

3P
SYSTEM

BCN

1 261988 x1 →
261989 x1 ←

2 260648 x2
Ø16 Ø9 x 5

3 263497 x1 →

4 303045 x11
Ø8

5 304028 x4
M8x25 DIN 7380

6 302024 x6
M8

7 304170 x1
M8x60 DIN 7380

8 263498 x1 ←

9 304053 x1
M8x30 DIN 7380

WARNING!

(NOTE): Compatible with TOP H0CX59IF





GB Do not fully tighten the screws until it is ensured that the KIT is correctly attached and aligned. Check tightness every 4 months.

E No apretar los tornillos del todo hasta asegurarse que el KIT está correctamente colocado y alineado. Repasar apriete cada 4 meses.

D Ziehen Sie die Schrauben nicht ganz fest, bevor Sie sich nicht vergewissert haben, daß der Bausatz korrekt eingestellt und ausgerichtet ist. Alle 4 Monate Drehmoment überprüfen.

I Non stringere del tutto le viti fin tanto non si è sicuri che il kit è collocato correttamente e allineato. Controllare il serraggio delle viti ogni 4 mesi.

F Ne pas serrer les vis avant d'être sûr que le KIT soit correctement positionné et ajusté. Vérifier le serrage des vis tous les 4 mois.

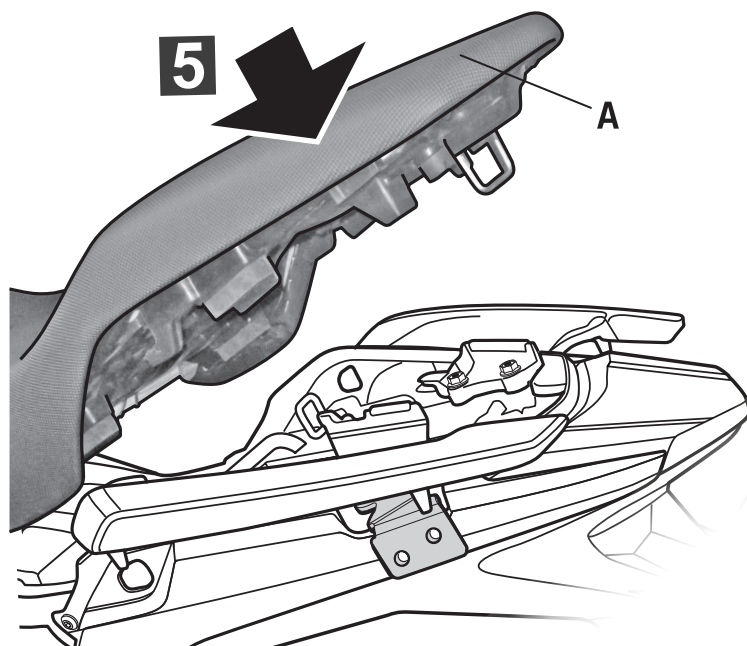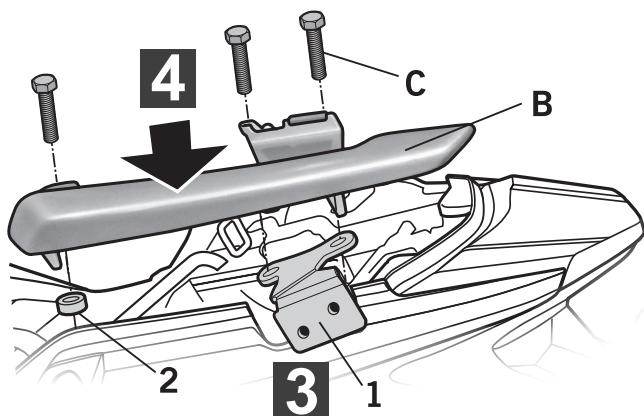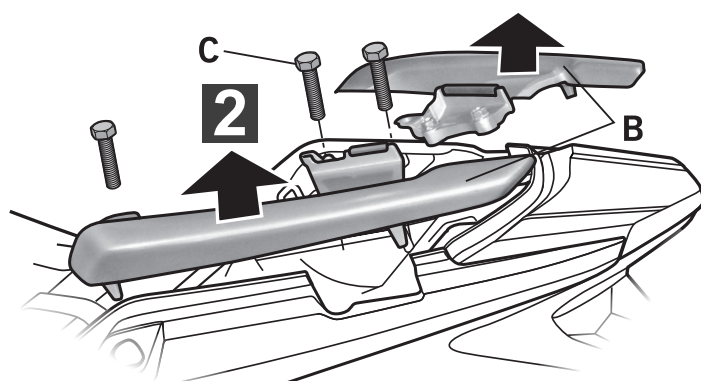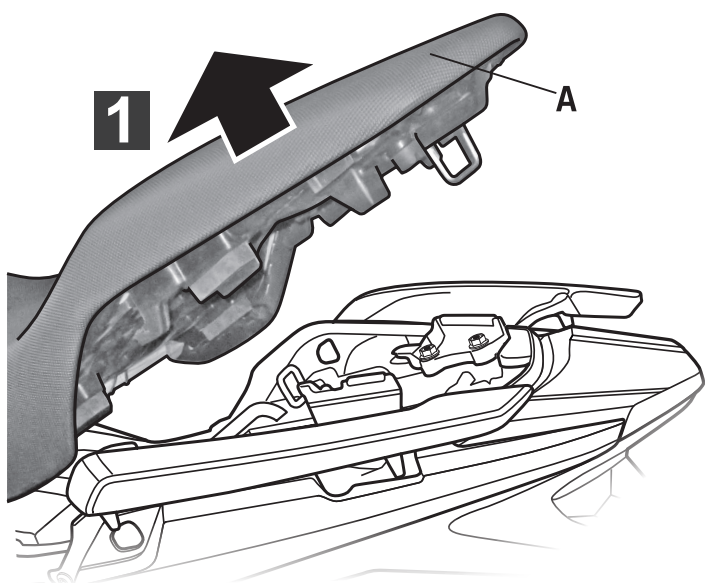

IMPORTANT: Based on European models.
For compatibility with models in other continents, check www.shad.es

