


SHAD

PEUGEOT TWEET 50 / 125 '24

SHAD LOCKS P0TW14SC

SIZE
5

BCN

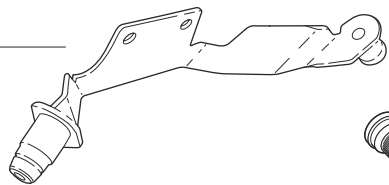

1 263935 x 1




2 262926 x 1
Ø16 x M8 x 13



3 262925 x 1
17x10 BAR 68mm



4 262987 x 1



5 304429 x 1
M8 x 100 DIN 912

WARNING!

(GB)

Tight firmly the pivot.
Make sure that the pivot
is firmly tight.
LUBRICATE ONLY WITH
WD-40 OIL!
Check tightness every
4 months.

(E)

Apretar el pivote
fuertemente. Asegurarse de
que el pivote queda
totalmente fijado. LUBRICAR
SOLO CON ACEITE WD-40 !
Reparar apriete cada 4
meses.

(D)

Zapfen besonders fest anziehen und
sicherstellen, dass er sich nicht
mehr bewegen kann. ALS
SCHMIERMITTEL IST NUR ÖL VOM
TYP (WD 40) ZU VERWENDEN
Alle 4 Monate Drehmoment
überprüfen.


(I)

Premere il perno con
forza. Assicurarsi che il
perno sia opletamente
fissato. LUBRIFICARE
SOLO CON OLIO WD-40!
Controllare il serraggio
delle viti ogni 4 mesi.


(F)

Serrer fortement le pivot.
S'assurer qu'il reste
totalement fixé.
AVEC WD-40!
Vérifier le serrage des
vis tous les 4 mois.


1

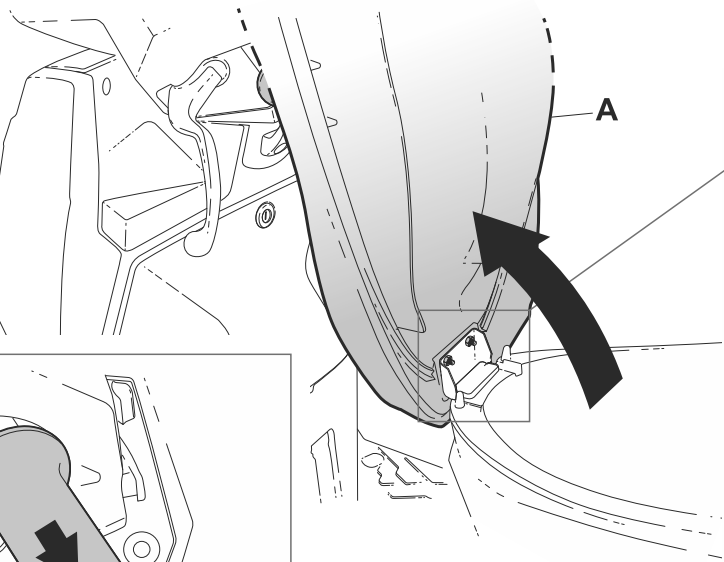


2

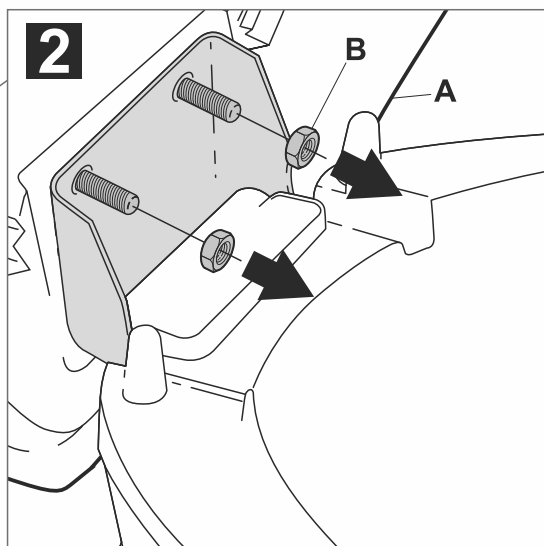


4

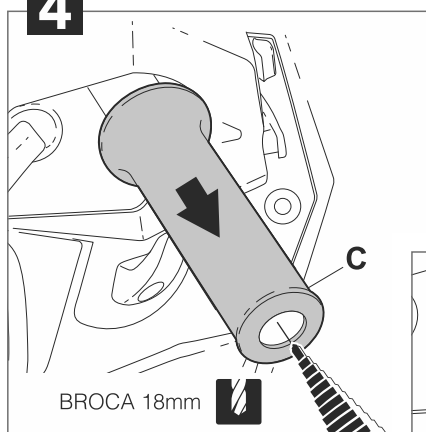


6

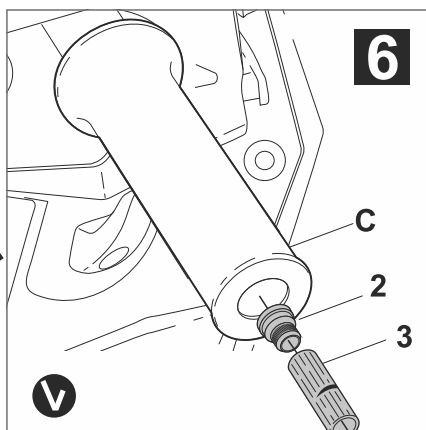

3

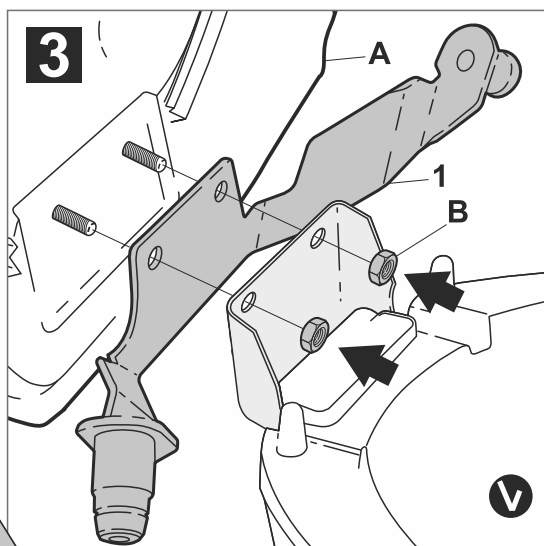

5



WWW.SHAD.ES

REF. 500479 Edition 2ª

IMPORTANT: Based on European models.
For compatibility with models in other continents,
check www.shad.es