



DIFFICULTY LEVEL

SHAD


QJMOTOR FORT ress 125 N `25

SHAD LOCKS Q0FR15SC

SIZE

5


BCN



1 263748 x 1



2 262920 x 1



3 304179 x 1
M6 x 65 DIN 912

WARNING! ⚠

(GB)

Tight firmly the pivot.
Make sure that the pivot
is firmly tight.
LUBRICATE ONLY WITH
WD-40 OIL!
Check tightness every
4 months

(E)

Apretar el pivote
fuertemente. Asegurarse de
que el pivote queda
totalmente fijado. LUBRICAR
SOLO CON ACEITE WD-40 !
Reparar apriete cada 4
meses

(D)

Zapfen besonders fest anziehen und
sicherstellen, dass er sich nicht
mehr bewegen kann. ALS
SCHMIERMITTEL IST NUR ÖL VOM
TYP (WD 40) ZU VERWENDEN
Alle 4 Monate Drehmoment
überprüfen.








(I)

Premere il perno con
forza. Assicurarsi che il
perno sia ometamente
fissato. LUBRIFICARE
SOLO CON OLIO WD-40!
Controllare il serraggio
delle viti ogni 4 mesi..

(F)

Serrer fortement le pivot.
S'assurer qu'il reste
totalement fixé.
AVEC WD-40!
Vérifier le serrage des
vis tous les 4 mois.

1

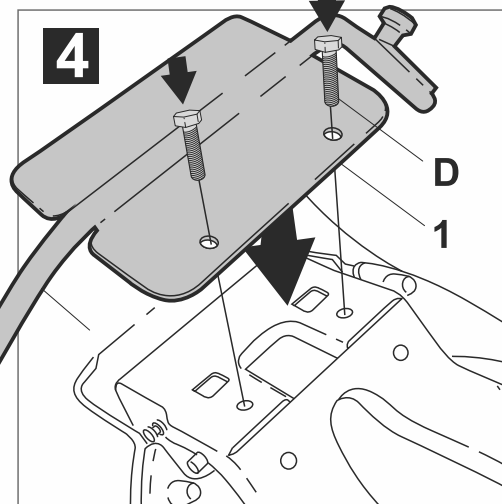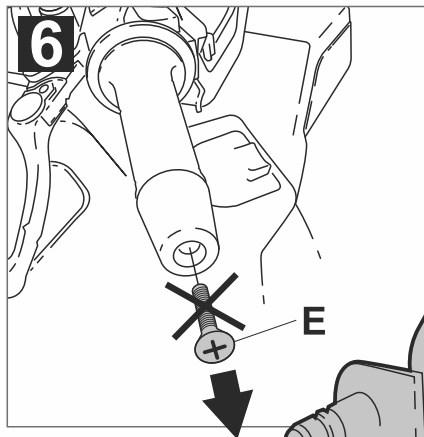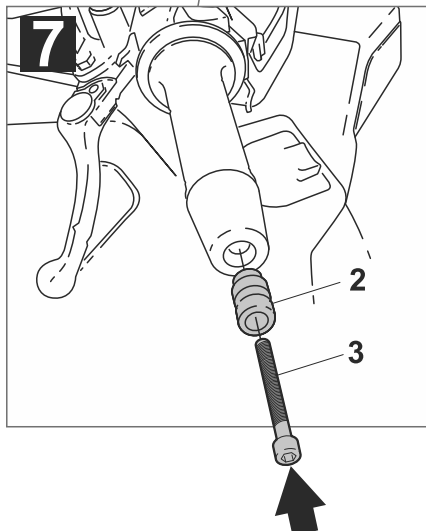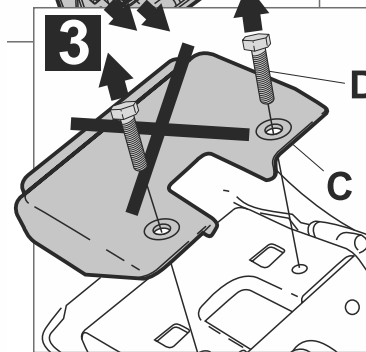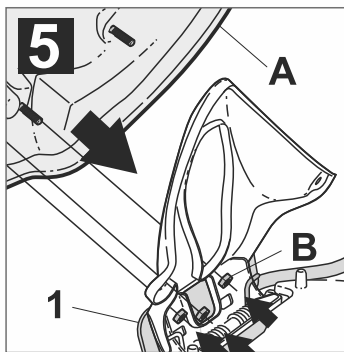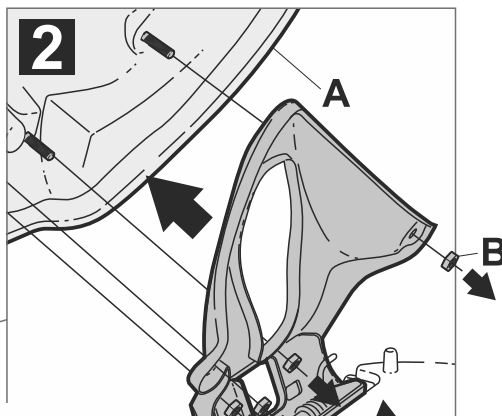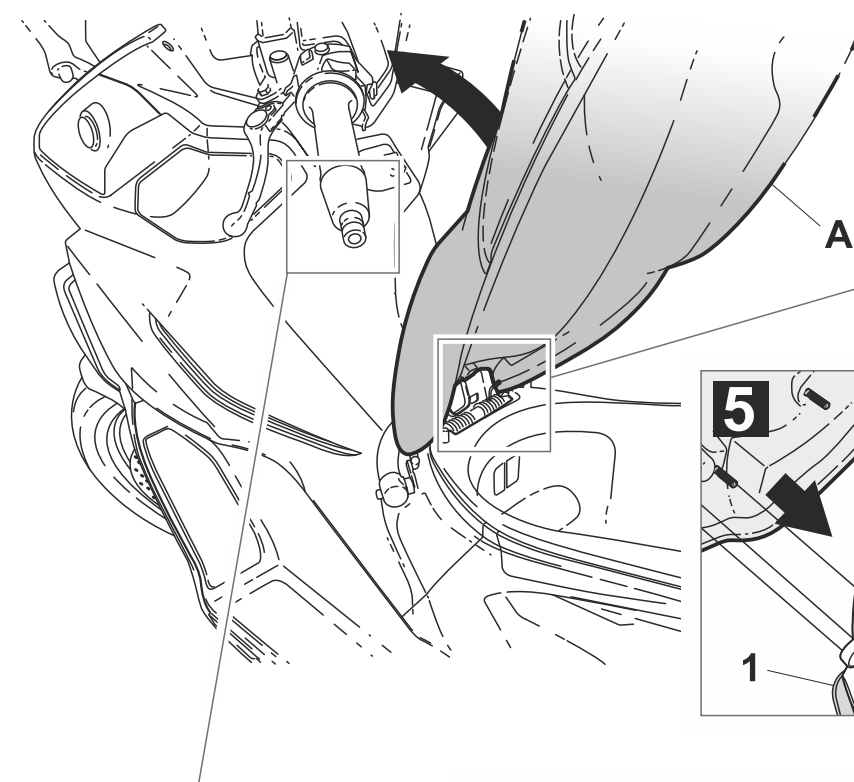

WWW.SHAD.ES

IMPORTANT: Based on European models. For compatibility with models in other continents, check www.shad.es

REF. 500479 Edition 1ª